



Cat, CATERPILLAR their respective logos ACERT and "Caterpillar Yellow", as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.  
For more complete information on CAT products, dealer services, and industry solutions, visit us on the web at: [www.cat.com](http://www.cat.com) and [www.cat.com/forestry](http://www.cat.com/forestry)  
©2009  
All Rights Reserved  
Printed in the USA  
Order Form # CATFS-0309  
Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment.  
See your Caterpillar dealer for available options.



# PURPOSE BUILT FORESTRY MACHINES

CAT® FOREST PRODUCTS FULL LINE POSTER



# MACHINES THAT HELP YOU PROFIT



STATIONARY MOUNT LOADERS



KNUCKLEBOOM LOADERS



FOREST MACHINES



TRACK SKIDDERS



TRACK FELLER BUNCHERS



TRACK HARVESTERS



FORWARDERS



WHEEL SKIDDERS



WHEEL FELLER BUNCHERS













WHEEL HARVESTERS



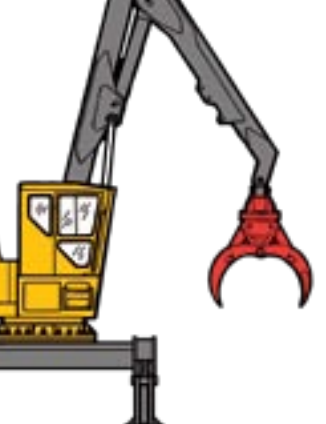






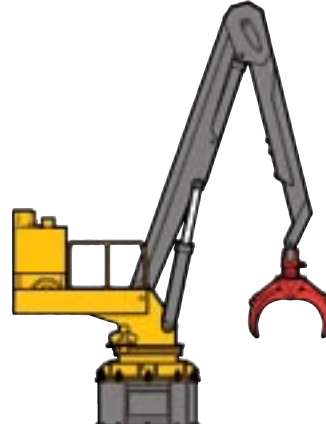










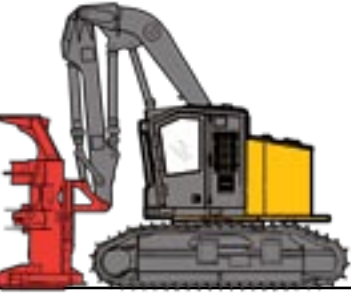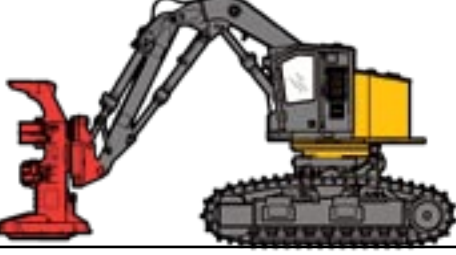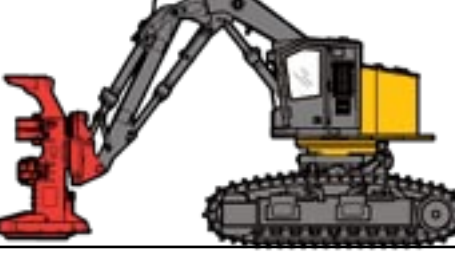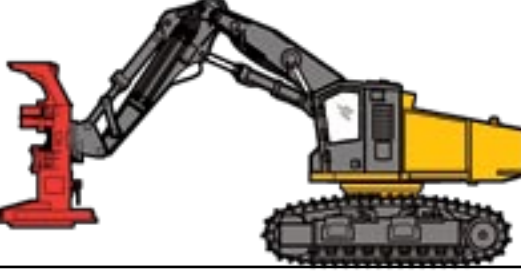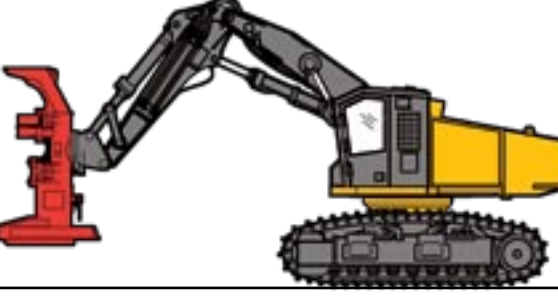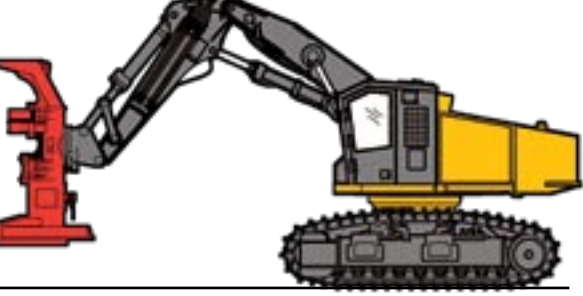




KNUCKLEBOOM LOADERS

									
<b>519 Knuckleboom Loader</b>	<b>529 Knuckleboom Loader</b>	<b>559B Knuckleboom Loader</b>	<b>569 Knuckleboom Loader</b>	<b>579 Knuckleboom Loader</b>	<b>519 SM Knuckleboom Loader</b>	<b>569 SM Knuckleboom Loader</b>	<b>519 SM Knuckleboom Loader - EHC</b>	<b>569 SM Knuckleboom Loader -EHC</b>	<b>559 Knuckleboom Loader - TMS</b>
Gross Power: 119 kw (160 hp) Lift Capacity @ Maximum Reach: 1 850 kg @ 8.2 m (4,079 lbs @ 27 in) Standard Boom Length: 8.2 m (27 ft)	Gross Power: 119 kw (160 hp) Lift Capacity @ Maximum Reach: 2 380 kg @ 8.8 m (5,246 lbs @ 29 ft) Standard Boom Length: 8.8 m (29 ft)	Horsepower: 124 kw (167 hp) Lift Capacity @ Maximum Reach: 2 798 kg @ 9.8 m (6,168 lbs @ 32 ft) Standard Boom Length: 9.8 m (32 ft)	Gross Power: 129 kw (173 hp) Lift Capacity @ Maximum Reach: 2 480 kg @ 9.9 m (5,468 lbs @ 32 ft 6 in) Standard Boom Length: 9.9 m (32 ft 6 in)	Gross Power: 129 kw (173 hp) Lift Capacity @ Maximum Reach: 2 480 kg @ 9.9 m (5,468 lbs @ 32 ft 6 in) Standard Boom Length: 9.9 m (32 ft 6 in)	Gross Power: 56 kw (75 hp) Lift Capacity @ Maximum Reach: 1 850 kg @ 8.2 m (4,079 lbs @ 27 ft) Standard Boom Length: 8.2 m (27 ft)	Gross Power: 75 kw (100 hp) Lift Capacity @ Maximum Reach: 2 480 kg @ 9.9 m (5,468 lbs @ 32 ft 6 in) Standard Boom Length: 9.9 m (32 ft 6 in)	Gross Power: 56 kw (75 hp) Lift Capacity @ Maximum Reach: 1 850 kg @ 8.2 m (4,079 lbs @ 27 ft) Standard Boom Length: 8.2 m (27 ft)	Gross Power: 75 kw (100 hp) Lift Capacity @ Maximum Reach: 2 480 kg @ 9.9 m (5,468 lbs @ 32 ft 6 in) Standard Boom Length: 9.9 m (32 ft 6 in)	Factory installed system that includes delimber, ground saw slasher and trailer Available with four loader models: 529 / 559 / 569 / 579








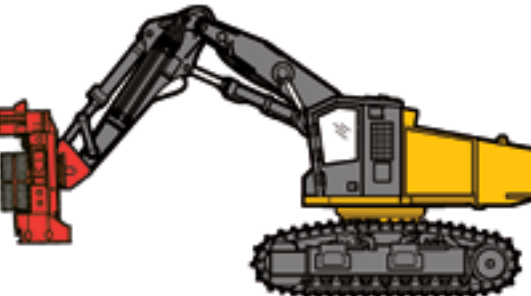
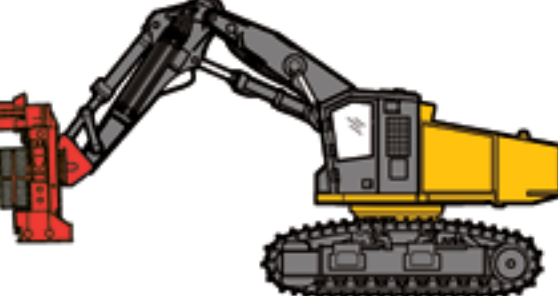

WHEEL FELLER BUNCHERS

									
<b>553 Wheel Feller Buncher</b>	<b>563 Wheel Feller Buncher</b>	<b>573 Wheel Feller Buncher</b>	<b>511 Track Feller Buncher</b>	<b>521 Track Feller Buncher</b>	<b>522 Track Feller Buncher</b>	<b>532 Track Feller Buncher</b>	<b>541 Track Feller Buncher</b>	<b>551 Track Feller Buncher</b>	<b>552 Track Feller Buncher</b>
Gross Power: 129 kw (173 hp) Wheelbase: 257.8 cm (101.5 in) Operating Wt w/o Attachment: 11 476 kg (25,300 lbs)	Gross Power: 147 kw (197 hp) Wheelbase: 287 cm (113 in) Operating Wt w/o Attachment: 12 272 kg (27,275 lbs)	Gross Power: 168 kw (225 hp) Wheelbase: 287 cm (113 in) Operating Wt w/o Attachment: 12 599 kg (27,775 lbs)	Gross Power at 1800 rpm: 184 kw (247 hp) Operating Wt w/o Head: 24 362 kg (53,710 lbs)	Gross Power at 1800 rpm: 211 kw (284 hp) Operating Wt w/o Head: 27 084 kg (59,710 lbs)	Gross Power at 1800 rpm: 211 kw (284 hp) Operating Wt w/o Head: 27 084 kg (59,710 lbs)	Gross Power at 1800 rpm: 211 kw (284 hp) Operating Weight w/o Head: 31 620 kg (69,710 lbs)	Gross Power at 1800 rpm: 227 kw (305 hp) Operating Weight w/o Head (standard linkage): 30 191 kg (66,560 lbs)	Gross Power at 1800 rpm: 227 kw (305 hp) Operating Weight w/o Head (standard linkage): 31 057 kg 68,468 lbs)	Gross Power at 1800 rpm: 227 kw (305 hp) Operating Weight w/o Head (standard linkage): 35 680 kg (78,660 lbs)






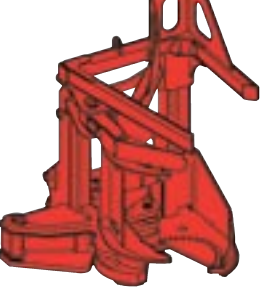




TRACK SKIDDERS

										
<b>517 Grapple Skidder</b>	<b>517 Cable Skidder</b>	<b>527 Grapple Skidder</b>	<b>527 Cable Skidder</b>	<b>525C Wheel Skidder</b>	<b>535C Wheel Skidder</b>	<b>545C Wheel Skidder</b>	<b>320D Forest Machine</b>	<b>324D Forest Machine</b>	<b>325D Forest Machine</b>	<b>330D Forest Machine</b>
Gross Power: 101 kw (136 hp) Operating Weight: 18 364 kg (40,450 lbs)	Gross Power: 101 kw (136 hp) Operating Weight: 17 330 kg (38,200 lbs)	Gross Power: 124 kw (166 hp) Operating Weight: 21 380 kg (47,140 lbs)	Gross Power: 124 kw (166 hp) Operating Weight: 17 236 kg (38,000 lbs)	Net Flywheel Power: 136 kw (182 hp) Operating Weight: 17 711 kg (39,045 lbs) Wheelbase: 3534 mm (139.2 in)	Net Flywheel Power: 152 kw (204 hp) Operating Weight: 18 044 kg (39,780 lbs) Wheelbase: 3534 mm (139.2 in)	Net Flywheel Power: 163 kw (219 hp) Operating Weight: 19 198 kg (42,325 lbs) Wheelbase: 3939 mm (155.1 in)	Net Flywheel Power: 117 kw (157 hp) Operating Weight (General Forestry HW): 26 900 kg (59,315 lbs)	Net Flywheel Power: 140 kw (188 hp) Operating Weight (General Forestry HW): 31 226 kg (68,853 lbs)	Net Flywheel Power: 152 kw (204 hp) Operating Weight (General Forestry HW): 33 329 kg (73,478 lbs)	Net Flywheel Power: 200 kw (268 hp) Operating Weight (General Forestry HW): 41 426 kg (91,344 lbs)

TRACK HARVESTERS

									
<b>501 Track Harvester</b>	<b>501 HD Track Harvester</b>	<b>511 Track Harvester</b>	<b>521 Track Harvester</b>	<b>522 Track Harvester</b>	<b>532 Track Harvester</b>	<b>541 Track Harvester</b>	<b>551 Track Harvester</b>	<b>552 Track Harvester</b>	<b>550 Wheel Harvester</b>
Gross Power: 117 kw (157 hp) Operating Wt w/o Head: 15 900 kg (35,000 lbs)	Gross Power: 117 kw (157 hp) Operating Wt w/o Head: 18 000 kg (40,000 lbs)	Gross Power at 1800 rpm: 184.2 kw (247 hp) Operating Wt w/o Head: 23 790 kg (52,440 lbs)	Gross Power at 1800 rpm: 211.8 kw (284 hp) Operating Wt w/o Head: 26 050 kg (57,440 lbs)	Gross Power at 1800 rpm: 211.8 kw (284 hp) Operating Wt w/o Head: 29 806 kg (65,710 lbs)	Gross Power at 1800 rpm: 211.8 kw (284 hp) Operating Wt w/o Head: 31 450 kg (69,340 lbs)	Gross Power: 227.4 kw (305 hp) Operating Wt w/o Head: 30 512 kg (67,267 lbs)	Gross Power: 227.4 kw (305 hp) Operating Wt w/o Head: 31 377 kg (69,175 lbs)	Gross Power: 227.4 kw (305 hp) Operating Wt w/o Head: 36 000 kg (79,367 lbs)	Gross Power: 147 kw (197 hp) Boom Length: 8.23 - 10.1 m (27 - 33 ft) Operating Weight: 21 319 kg (47,040 lbs)

FORWARDERS

									
<b>534 Forwarder</b>	<b>544 Forwarder</b>	<b>564 Forwarder</b>	<b>574 Forwarder</b>	<b>Felling Saws</b>	<b>Felling Shear</b>	<b>Processing Heads</b>	<b>Log Loader Grapples</b>	<b>Trailer Mount Delimbers</b>	<b>Ground Saw Slashers</b>
Gross Power: 93 kw (125 hp) Load Capacity: 7.3 t (8 ton) Weight: 12 701 kg (28,000 lbs)	Gross Power: 93 kw (125 hp) Load Capacity: 10.9 t (12 ton) Weight: 14 515 kg (32,000 lbs)	Gross Power: 129 kw (173 hp) Load Capacity: 13.6 t (15 ton) Weight: 16 329 kg (36,000 lbs)	Gross Power: 129 kw (173 hp) Load Capacity: 14.5 t (16 ton) Weight: 17 237 kg (38,000 lbs)	A complete line of single and dual post saws are available for all felling and harvesting applications.	An accumulating shear is available as a low cost, low maintenance option for felling applications.	Fixed mount or dangle type heads are available in a variety of cutting capacities to meet your specific harvesting needs.	A wide range of continuous and non-continuous models are offered for all loading, delimbing and slashing applications.	Models designed for maximum productivity and reliability in all delimbing applications.	Slasher saws feature patented load sensing saw feed system and direct drive fast cycle times and maximized production.

FORESTRY EQUIPMENT ATTACHMENTS