



We reserve the right to change specifications and to improve our products without notice or obligation. Form No. 799-0904  
TIMBERKING  
535 MACK TODD ROAD  
ZEBULON, NC 27597  
919 269-7421 FAX 919 269-0257

Visit us at  
[www.timberkingequipment.com](http://www.timberkingequipment.com)  
to see our full line of  
timber products.











# WORK SMARTER AND HARDER.

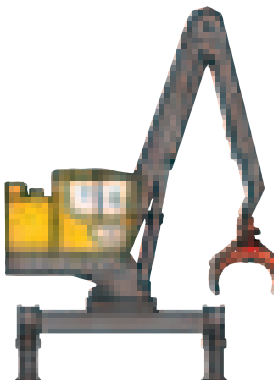
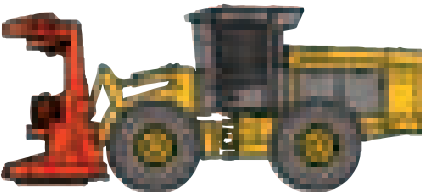

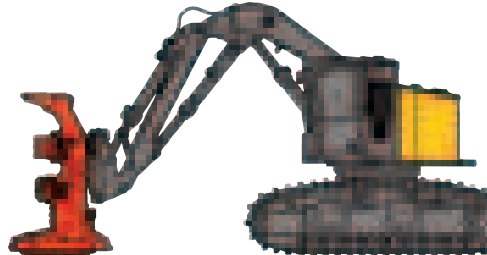
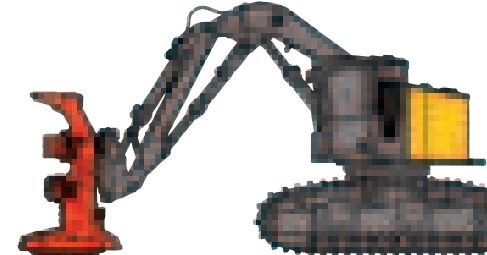
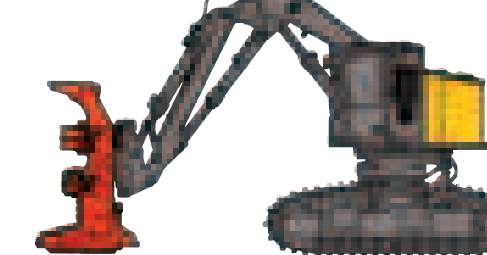

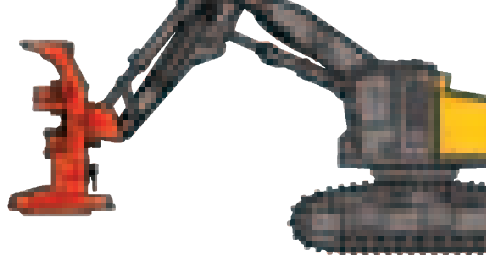
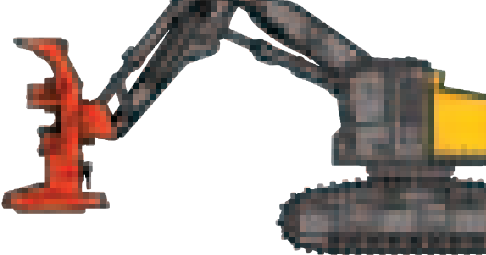
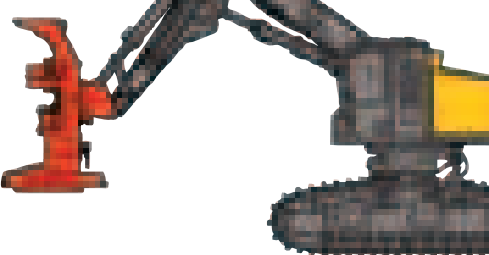





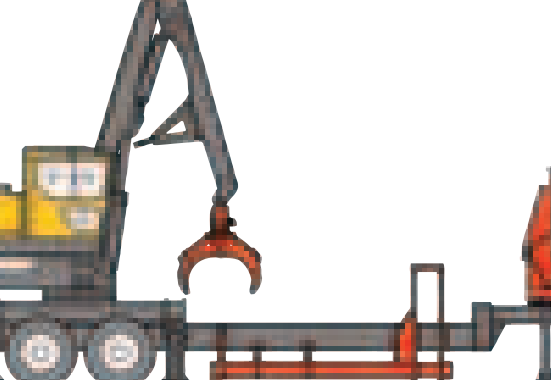



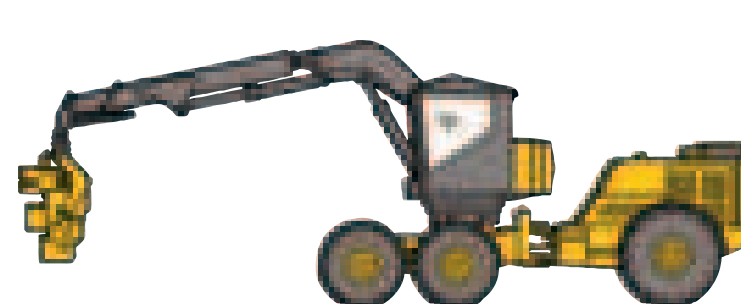
Every machine we manufacture  
is driven by a strong Caterpillar engine and  
backed by an equally-strong commitment from  
your local Caterpillar dealer.  
Give yourself an advantage that makes sense.






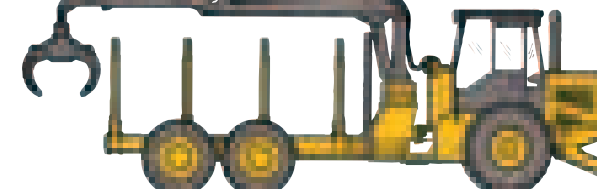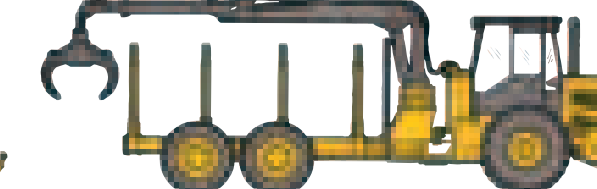



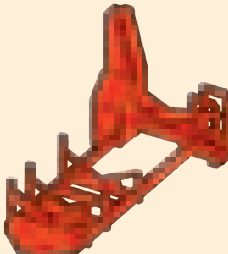
Nothing about logging will  
ever be easy so it pays to work smart.  
When it comes to power and  
dependability, no matter what the job,  
the full line of Timberking products  
has what it takes to get the job done.



| LOADERS  |  |  |  |  |  |  |   |  |  |  |
|--|--|--|--|--|--|--|---|--|--|--|
| Turntable Mount  |  |  |  |  | Total Merchandising System   | Stationary Mount   |   |  |  |  |
|   |   |   |    |   |   |   |    |   |   |  |
| <b>TK520</b>   | <b>TK540</b>   | <b>TK560</b>   | <b>TK570</b>   | <b>TK575</b>   | <b>DS Models</b>   | <b>TK520-SM</b>  | <b>TK570-SM</b>   | <b>TK520-SM-EHC</b>  | <b>TK570-SM-EHC</b>  |  |
| <ul style="list-style-type: none"><li>●Horsepower: 161 (120 kw)</li><li>●Lift Capacity @ Maximum Reach: 4,079 lbs. @ 27' (1,850 kg @ 8.2 m)</li><li>●Standard Boom Length: 27' (8.2 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 161 (120 kw)</li><li>●Lift Capacity @ Maximum Reach: 5,246 lbs. @ 29' (2,380 kg @ 8.8 m)</li><li>●Standard Boom Length: 29' (8.8 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 161 (120 kw)</li><li>●Lift Capacity @ Maximum Reach: 6,168 lbs. @ 32' (2,798 kg @ 9.8 m)</li><li>●Standard Boom Length: 32' (9.8 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 161 (120 kw)</li><li>●Lift Capacity @ Maximum Reach: 5,468 lbs. @ 32' 6" (2,480 kg @ 9.8 m)</li><li>●Standard Boom Length: 32' 6" (9.9 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 161 (120 kw)</li><li>●Lift Capacity @ Maximum Reach: 6,976 lbs. @ 32' 6" (3,164 kg @ 9.9 m)</li><li>●Standard Boom Length: 32' 6" (9.9 m)</li></ul> | <ul style="list-style-type: none"><li>●Factory installed system that includes delimber, ground saw slasher and trailer</li><li>●Available with four loader models: TK540 DS / TK560 DS / TK570 DS / TK575 DS</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 75 (56 kw)</li><li>●Lift Capacity @ Maximum Reach: 4,079 lbs. @ 27' (1,850 kg @ 8.2 m)</li><li>●Standard Boom Length: 27' (8.2 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 100 (75 kw)</li><li>●Lift Capacity @ Maximum Reach: 6,100 lbs. @ 36' (2,767 kg @ 11 m)</li><li>●Standard Boom Length: 32' 6" (9.9 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 75 (56 kw)</li><li>●Lift Capacity @ Maximum Reach: 4,079 lbs. @ 27' (1,850 kg @ 8.2 m)</li><li>●Standard Boom Length: 27' (8.2 m)</li></ul> | <ul style="list-style-type: none"><li>●Horsepower: 100 (75 kw)</li><li>●Lift Capacity @ Maximum Reach: 6,100 lbs. @ 36' (2,767 kg @ 11m)</li><li>●Standard Boom Length: 32' 6" (9.9 m)</li></ul> |  |

| FELLER BUNCHERS   |   |   |  |   |   |   |   |   |   |
|---|---|---|--|---|---|---|---|---|---|
| Drive-to-Tree Wheel Mount   |   |   |  |   | Swing-to-Tree Track Mount   |   |   |   |   |
|   |    |    |    |    |    |    |    |    |    |
| <b>TK340</b> <ul style="list-style-type: none"><li>●Horsepower: 175 (130 kw)</li><li>●Wheelbase: 101.5" (257.8 cm)</li><li>●Weight: 25,300 lbs. (11,476 kg)</li></ul> | <b>TK350</b> <ul style="list-style-type: none"><li>●Horsepower: 200 (149 kw)</li><li>●Wheelbase: 113" (287 cm)</li><li>●Weight: 27,275 lbs. (12,372 kg)</li></ul> | <b>TK360</b> <ul style="list-style-type: none"><li>●Horsepower: 225 (168 kw)</li><li>●Wheelbase: 113" (287 cm)</li><li>●Weight: 27,775 lbs. (12,599 kg)</li></ul> | <b>TK711</b> <ul style="list-style-type: none"><li>●Horsepower: 228 (170 kw)</li><li>●Weight: 53,710 lbs. (24,362 kg)</li><li>●Drive Type: D5H or D5H HD Track</li></ul> | <b>TK721</b> <ul style="list-style-type: none"><li>●Horsepower: 243 (181 kw)</li><li>●Weight: 59,710 lbs. (27,084 kg)</li><li>●Drive Type: D5H HD or D6H HD Track</li></ul> | <b>TK722</b> <ul style="list-style-type: none"><li>●Horsepower: 243 (181 kw)</li><li>●Weight: 65,710 lbs. (29,806 kg)</li><li>●Drive Type: D6H HD Track</li></ul> | <b>TK732</b> <ul style="list-style-type: none"><li>●Horsepower: 262 (196 kw)</li><li>●Weight: 69,710 lbs. (31,620 kg)</li><li>●Drive Type: D7 (CAT 330) Track</li></ul> | <b>TK741</b> <ul style="list-style-type: none"><li>●Horsepower: 262 (196 kw)</li><li>●Weight: 69,800 lbs. (31,660 kg)</li><li>●Drive Type: D6H HD Track</li></ul> | <b>TK751</b> <ul style="list-style-type: none"><li>●Horsepower: 282 (210 kw)</li><li>●Weight: 74,100 lbs. (33,611 kg)</li><li>●Drive Type: D7 (CAT 345) Track</li></ul> | <b>TK752</b> <ul style="list-style-type: none"><li>●Horsepower: 282 (210 kw)</li><li>●Weight: 82,100 lbs. (37,240 kg)</li><li>●Drive Type: D7 (CAT 345) Track</li></ul> |

| FORWARDERS   |   |  |   |   | HARVESTERS  |   |  |
|--|---|--|---|---|---|---|--|
| Four Wheel   |   | Six Wheel  | Eight Wheel   |   | Track Type  | Rubber Tire   |  |
|    |    |   |   |    |    |    |   |
| <b>TK434</b> <ul style="list-style-type: none"><li>●Horsepower: 125 (93 kw)</li><li>●Load Capacity: 8 ton (7.3 t)</li><li>●Weight: 27,000 lbs. (12,247 kg)</li></ul> | <b>TK434L</b> <ul style="list-style-type: none"><li>●Horsepower: 125 (93 kw)</li><li>●Load Capacity: 9 ton (8.2 t)</li><li>●Weight: 29,000 lbs. (13,154 kg)</li></ul> | <b>TK436</b> <ul style="list-style-type: none"><li>●Horsepower: 125 (93 kw)</li><li>●Load Capacity: 12 ton (10.9 t)</li><li>●Weight: 31,000 lbs. (14,061 kg)</li></ul> | <b>TK456</b> <ul style="list-style-type: none"><li>●Horsepower: 170 (127 kw)</li><li>●Load Capacity: 15 ton (13.6 t)</li><li>●Weight: 36,000 lbs. (16,329 kg)</li></ul> | <b>TK458</b> <ul style="list-style-type: none"><li>●Horsepower: 170 (127 kw)</li><li>●Load Capacity: 16 ton (14.5 t)</li><li>●Weight: 38,000 lbs. (17,237 kg)</li></ul> | <b>TK701</b> <ul style="list-style-type: none"><li>●Horsepower: 165 (123 kw)</li><li>●Weight: 35,000 lbs. (15,876 kg)</li><li>●Drive Type: D4 Track</li></ul> | <b>TK701HD</b> <ul style="list-style-type: none"><li>●Horsepower: 165 (123 kw)</li><li>●Weight: 40,000 lbs. (18,144 kg)</li><li>●Drive Type: D5</li></ul> | <b>TK856</b> <ul style="list-style-type: none"><li>●Horsepower: 190 (142 kw)</li><li>●Weight: 44,000 lbs. (19,958 kg)</li><li>●Drive Type: 6-wheel hydrostatic</li></ul> |

| INDUSTRIAL TRACTORS AND ATTACHMENTS   |  |   |   | FORESTRY EQUIPMENT ATTACHMENTS   |   |  |  |   |   |
|---|--|---|---|--|---|--|--|---|---|
|   |   |  |  |   |                                    |   |   |    |    |
| <b>TK341</b> <ul style="list-style-type: none"><li>●Horsepower: 185 (138 kw)</li><li>●Wheelbase: 100" (254 cm)</li><li>●Weight: 22,900 lbs. (10,387 kg)</li></ul> | <b>Rotary Ax</b> <p>A choice of attachments for land and right-of-way clearing is available to maximize machine productivity and flexibility. Quick-connect hydraulic couplings permit fast, easy connection of remote hydraulic lines to power attachments with multiple hydraulic functions.</p> | <b>Rotary Mulcher</b>   | <b>Felling Saw</b>  | <b>Disc Saws</b> <p>A complete line of single and dual post saws is available for all felling and harvesting applications.</p> | <b>Shears</b> <p>An accumulating shear is available as a low cost, low maintenance option for felling applications.</p> | <b>Harvesting Heads</b> <p>An extensive line with fixed or dangle head design is available for all harvesting and processing applications.</p> | <b>Log Loader Grapples</b> <p>A wide range of continuous and non-continuous models are offered for all loading, delimbing and slashing applications.</p> | <b>Trailer Mount Delimbers</b> <p>Several models of pull through delimbers are available for hard-wood and softwood applications.</p> | <b>Ground Saw Slashers</b> <p>Several models are available for hardwood and softwood applications and single stems as well as multiple stems.</p> |



[www.timberkingequipment.com](http://www.timberkingequipment.com)

# Products

Loaders  
Feller Bunchers  
Harvesters  
Forwarders  
Industrial Tractors & Attachments  
Forestry Equipment Attachments